




The Acoustic Ones

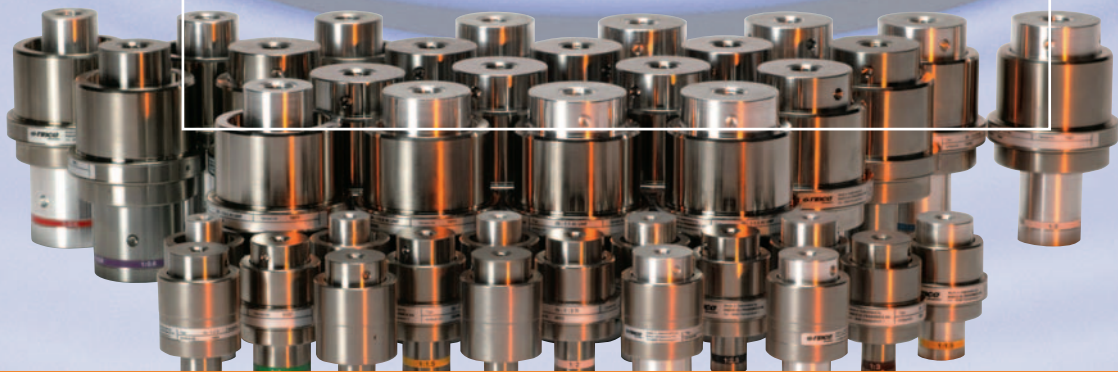

Standard Boosters

Standard boosters 35 kHz / 20 kHz

The standard boosters are suitable for the amplification of the amplitude of standard machines and special actuators.





- . Designed for the assembly into ultrasonic welding machines and special actuators
- . The ideal booster for every application thanks to a great range of amplifications factors and materials
- . Heavy duty
- . Low-loss and true to amplitude
- . Rigid storing in clamp housing

Specification standard boosters

Operating frequency:	20 kHz / 35 kHz	
Weight:	Booster 20 kHz:	1.5 kg
	Booster 35 kHz:	350 g
Housing:	Booster 20 kHz:	Nickel-plated steel, with shoulder
	Booster 35 kHz:	Nickel-plated steel, there are two variants:
	a) Booster with shoulder:	Standard for ultrasonic welding machines
	b) Booster without shoulder:	For cutting units axially moveable
Amplification factors:	Booster 20 kHz with shoulder:	
	Aluminium:	1:0.4 / 1:0.5 / 1:0.6 / 1:0.8 / 1:1 / 1:1.5 / 1:1.75 / 1:2
	Titanium:	1:0.5 / 1:0.6 / 1:1 / 1:1.5 / 1:2 / 1:2.5 / 1:3
	Booster 20 kHz with shoulder and UNF connection thread:	
	Aluminium:	1:0.5 / 1:0.8 / 1:1 / 1:1.5
	Titanium:	1:1 / 1:1.5 / 1:2 / 1:2.5
	Booster 35 kHz with shoulder:	
	Aluminium:	1:0.4 / 1:0.5 / 1:0.6 / 1:0.8 / 1:1 / 1:1.5 / 1:2
	Titanium:	1:1 / 1:1.5 / 1:2 / 1:3
	Booster 35 kHz without shoulder:	
	Aluminium:	1:1 / 1:1.5
	Titanium:	1:2 / 1:2.5 / 1:3

Additional technical information available on request.



RINCO ULTRASONICS AG

CH-8590 Romanshorn 1

Tel. +41 71 466 41 00

Fax +41 71 466 41 01

info@rincoultrasonics.com

www.rincoultrasonics.com